


Date:	Phone:	
Company:		
Name:		
Email:		

## **LO-DOCK/DOOR SEAL WORKSHEET**

**IMPORTANT:** Pallet Jacks are not recommended for use with dock levelers. However, in some cases they may be used to accommodate 3" above dock and 3" below dock applications.

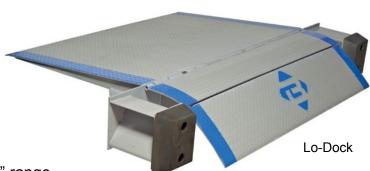

**NOTE:** To achieve the occasional use of a +/-5" range, we recommend a gas or propane forklift. The dock leveler should not be used for frequent use +/-5".


## **GENERAL INFORMATION:**

	Are you interested in: (check one)  Lo-Dock Unit or Door Seal Unit (open dock) (overhead door)  What is the dock height? inches
3.	What is the truck bed height? Min Max.
4.	When the truck is in position to be serviced, how much taller does the dock need to be (what height Lo-Dock do you need)? inches
5.	What is the rated lifting capacity of the forklift being used? lbs.
6.	Is the forklift electric, gasoline or propane?
7.	Does the forklift have 3 wheels or 4 wheels?
8.	How many shifts per day will the dock leveler be used?   one shift   multiple shifts
9.	Will this location service refrigerated trailers?

PLEASE COMPLETE BOTH PAGES OF THIS WORKSHEET


**NOTE:** The face of the dock should be free of any projections or dock bumpers before theinstallation

V32017




process begins.







## **LO-DOCK WITH DOOR SEAL APPLICATIONS**

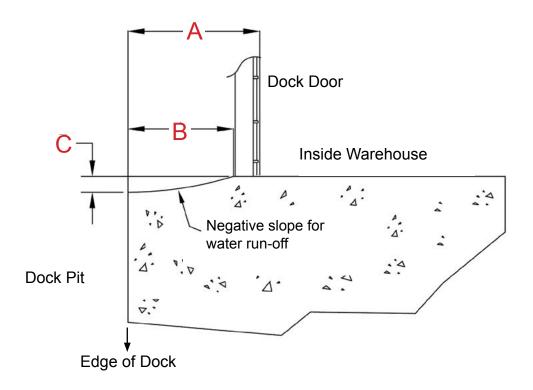

Door Seal Information: this will determine the width and length of the door seal.	
Dimension A - From the inside surface of the door when closed, to the face of the docki	inches
What is the narrowest part of the door opening? inches	
Dain Clana Information, this will define the rain clane or sten down if present	
Rain Slope Information: this will define the rain slope or step down if present.	
Is there a rain slope present? Yes No. If No, skip dimension B and C below.	
·	_ inches

V32017

